

# DI gG 2A/500V



## Specifications

ETI Code	002311401
Description	DI gG 2A/500V
Class name	Fuse link
Rated current (A)	2
Type	D
Size	DI
Characteristics	gG
Rated AC voltage (V)	500
Rated DC voltage (V)	250
Dimensions	E16
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Power dissipation (W)	2,8
Standards	DIN EN 60269-1, DIN EN 60269-3
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Dimensions	E16
Indicator	Top fuse status indicator
Power dissipation (W)	2,8
Standards	DIN EN 60269-1, DIN EN 60269-3

[Online product page](#)

## Other documentation



[Instruction manual](#)  
[Technical data catalogue](#)  
[CE declaration](#)




## ETIM international classification


Classification	EC000099
Class name	D-system fuse link
Application	For cable protection
Breaking capacity	50
Colour code	Pink
Construction size	DI
Max. rated operation voltage Ue AC	500
Nominal rated current	2A
Nominal rated voltage	500

Rated voltage at DC	250
Release characteristic	Time-lag
Type of fuse status indicator	Top fuse status indicator
Utilization category	gL/gG (cable protection/equipment protection)


# Melting energy characteristics

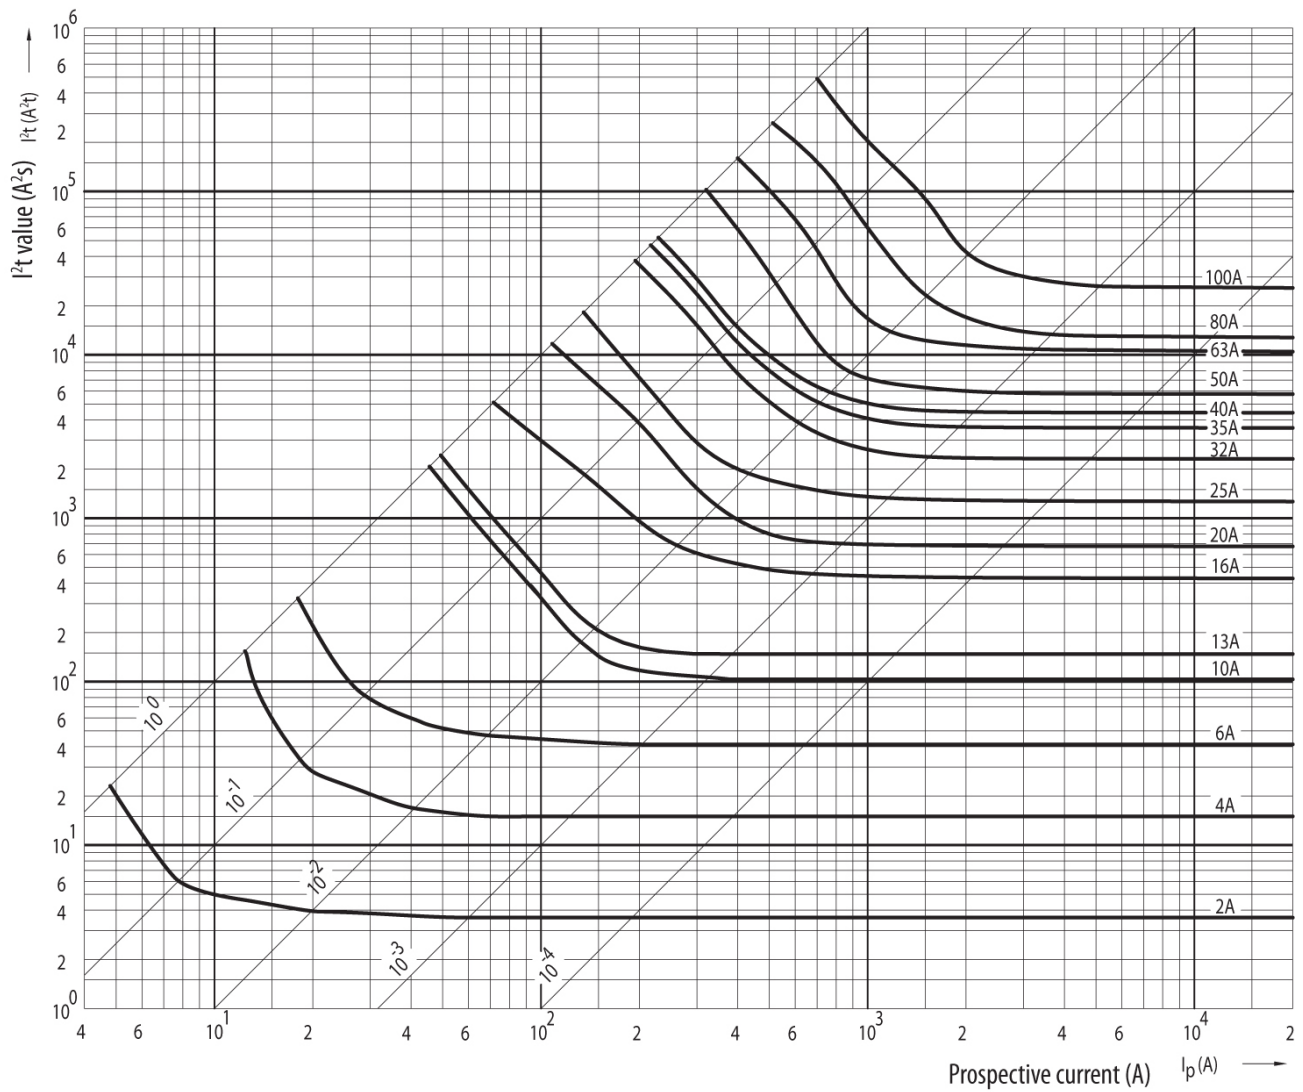

# Characteristics

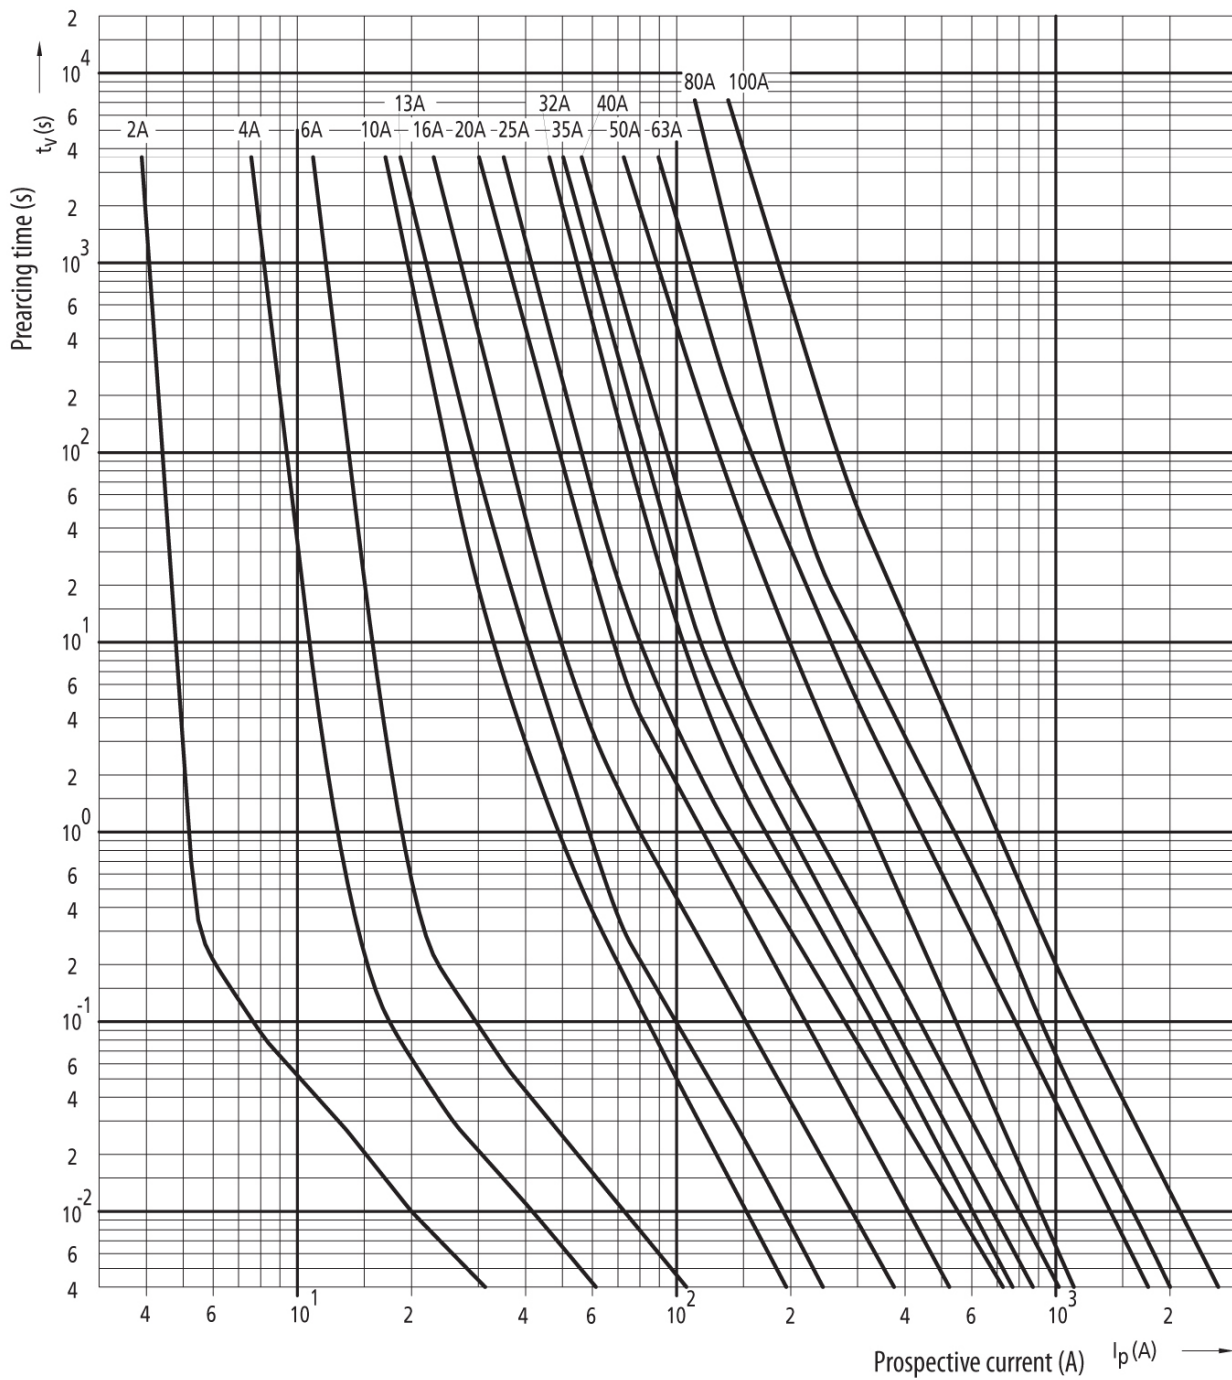

## Dimension drawing

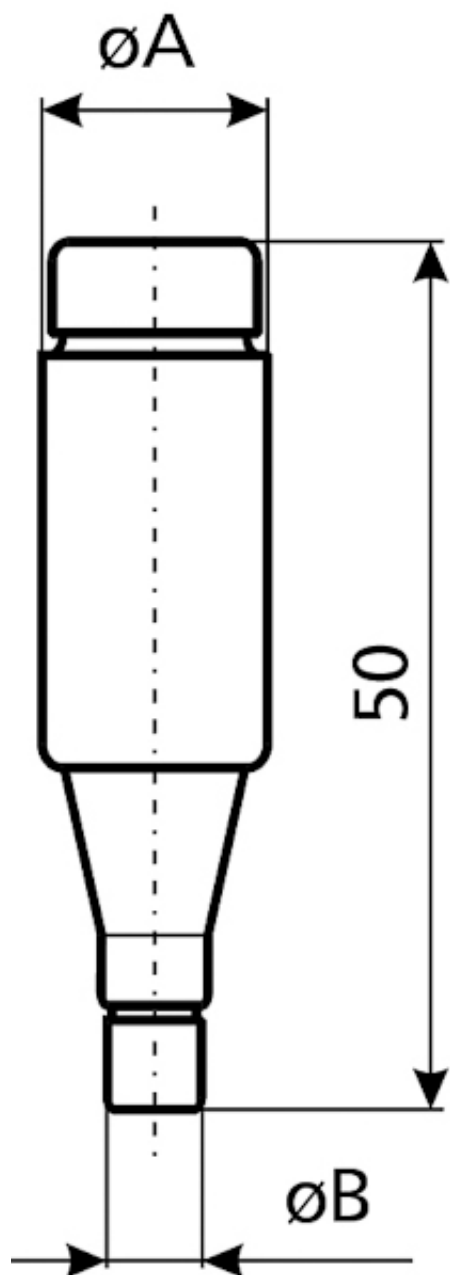

[A]	$\varnothing A$	$\varnothing B$
2	13,2	6
4	13,2	6
6	13,2	6
10	13,2	8
16	13,2	10
20	13,2	12
25	13,2	14

# Cut-off current characteristics

