

# DIII UQ gR 35A 500V



## Specifications

ETI Code	004323001
Description	DIII UQ gR 35A 500V
Class name	Fuse link
Rated current (A)	35
Type	D
Size	DIII
Characteristics	gR
Rated AC voltage (V)	500
Rated DC voltage (V)	315
Dimensions	E33
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Power dissipation (W)	12
Standards	IEC 60269-4
Operating joule integral (A2s)	539
Application	For protection of semiconductor devices
Application	For protection of semiconductor devices
Power dissipation (W)	12
Operating joule integral (A2s)	539
Indicator	Top fuse status indicator
Dimensions	E33
Breaking capacity DC (kA)	8
Breaking capacity AC (kA)	50
Standards	IEC 60269-4

[Online product page](#)

## Other documentation



[Instruction manual](#)  
[Technical data catalogue](#)  
[CE declaration](#)




## ETIM international classification


Classification	EC000099
Class name	D-system fuse link
Application	For protection of semiconductor devices
Breaking capacity	50
Colour code	Black

Construction size	DIII
Max. rated operation voltage Ue AC	500
Nominal rated current	35A
Nominal rated voltage	500V
Rated voltage at DC	315
Release characteristic	Super fast (FF)
Type of fuse status indicator	Top fuse status indicator
Utilization category	gR (general purpose semiconductor protection)

# Melting energy characteristics

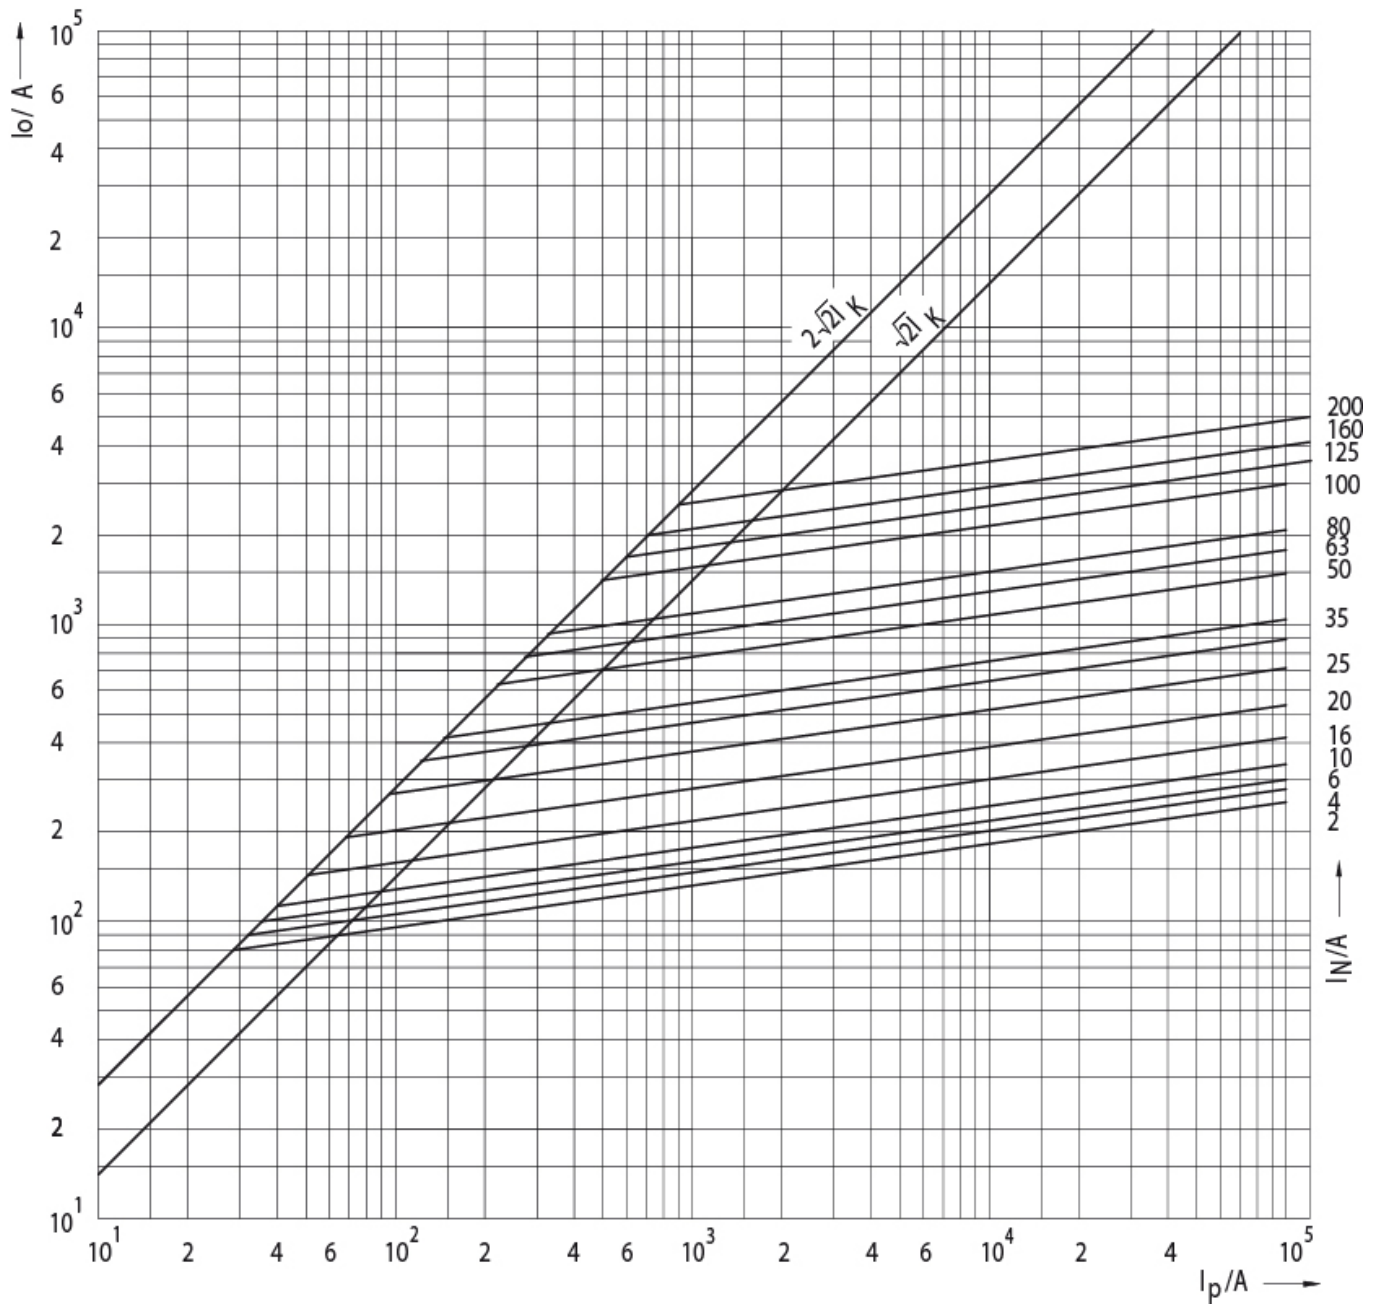

# Characteristics

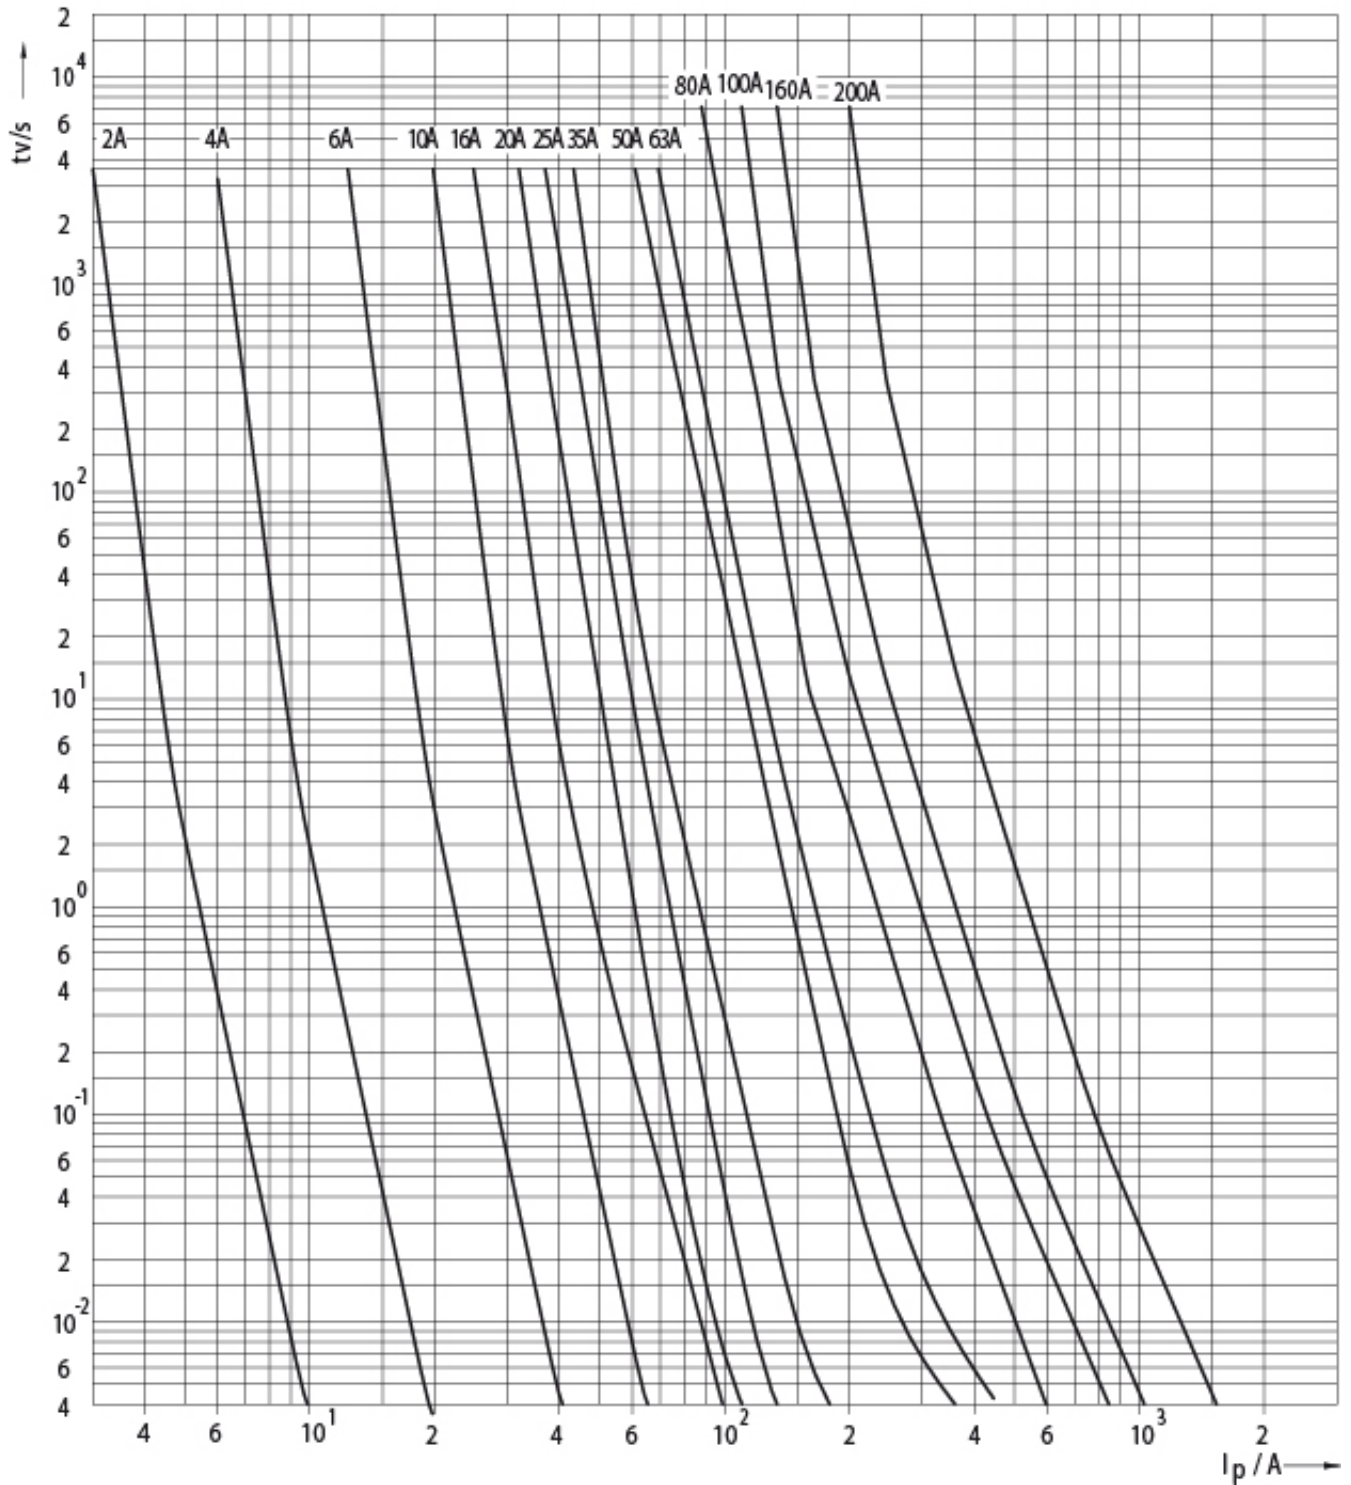

## Dimension drawing

